

3+1 AXIS MACHINING CENTER: Designed for drilling, conventional milling and copy milling operations in aluminum profiles. Other materials include composite panels, steel profiles, plain or steel reinforced PVC profiles, and various other plastics or wood.


WORKING DIMENSIONS: X—137", 256", 315", CUSTOM | Y—19.7" | Z—8.7"

AXIS SPEEDS (INCHES PER MINUTE): X—3,150 | Y—1,181 | Z—1,181



Optional sound deadening enclosure

Rotating and standard clamps pictured

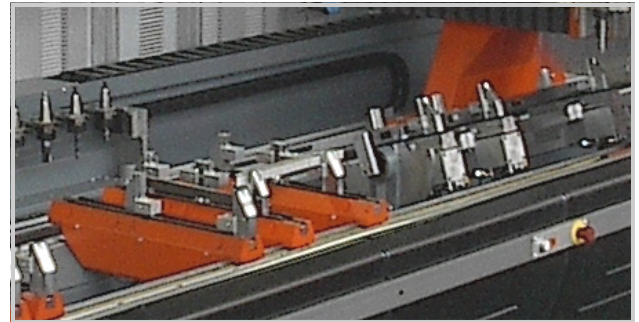

STANDARD:

- **Construction:** Welded steel bed frame with hardened and ground X axis guides and double precision rack and pinion axis motion driven by brushless motors. Bridge type gantry assembly made from cast structural beams with hardened and ground Y and Z axis guides and precision ball & screw drive motion driven by brushless motors.
- **Electrospindle:** 10 Hp/24,000 RPM ISO30 is standard. 4 pole. Air cooled. Higher power electrospindles are available by request.
- **NC:** Modular with industrial PC, 1 GHz CPU, 20 Gb hard drive, Ethernet, serial ports RS 232, parallel port, USB port, 15" color monitor, modem, mouse, keyboard, Windows XP®.
- **Software:** Capability to program while machine is operating. CN6 control software with ISO language editor and compiler, SLW (Self Learning Software; graphical user interface that allows programming based on visual reference between machine display and technical drawings or sketches), ISOWIN (2D graphical user interface for generating and displaying machinings on 3 sides of the work-piece), FORMULA (for carrying out the same machinings on work-pieces of varying dimensions).
- **Tool magazine:** Fixed along X axis. 9 tool positions. Additional stores optional. 5 to 10 second tool change.
- **TWIN Mode:** Segmentation of the work area to allow loading/unloading while the machine is operating (256"+ versions only)
- **Clamping system:** Automatic pneumatic vice clamps.
- **Coolant system:** Pressure fed micro-drop technology. Any non-corrosive coolant can be used.
- **Safety device:** Photocells along front of machine, electro-welded steel structure on sides (with windows that may be removed to accommodate work-pieces longer than the machine), and metal acoustic insulating panels along back.
- **Linear repeatability:** Positioning controlled by rotating transducers. Programmed linear positions will repeat to $\pm 0.0039"$.
- **Tool length sensor**
- **Dry run capability**
- **Tool life alarm, production counter & cycle timer**
- **Absolute and incremental jog**
- **Fixed zero-point stop**
- **5 days on-site installation and training**
- **1 year/2,000 hours warranty on parts and labor**

OPTIONS:

- **SLW software for the office**
- **NC Tool: 2D CAM software for drawing and importing CAD drawings then generating machine code in ISO**
- **TK CAM: 3D CAM software for advanced graphical interface and programming**
- **Bar code utilities for automating program load and for integration to production systems**
- **Bar code reader - hardwired or wireless**
- **Double clamping system: automatic vice clamps that allow work-pieces to be parallel loaded**
- **Rotating clamp system: +90° to -90° in 0.1° increments. Max. 11.8" Y axis, 7.8" Z axis**
- **Chips conveyor system for automatic removal of chips and debris created during machining**
- **Sound deadening enclosure**
- **Laser datum finder**
- **Probing system**
- **Remote control console for jog and other controls while standing anywhere along the X axis**
- **Voltage stabilizer**
- **Uninterruptible power supply**
- **Electronics cabinet cooling system**

Tekna USA Corp.

905 Pingree Road, Unit B
Crystal Lake, IL 60014
USA

Toll free: 877-477-4840

Phone: 815-477-4840

Fax: 815-477-4870

E-mail: info@teknausa.com

www.teknausa.com